
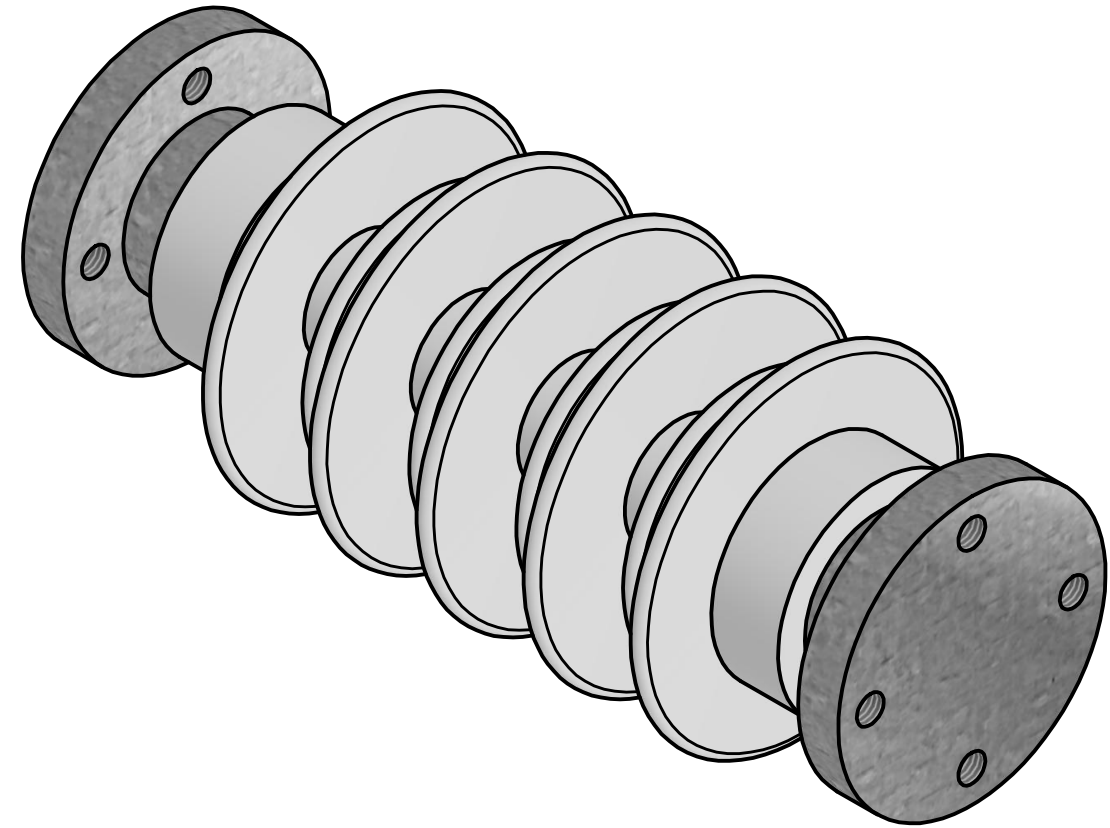


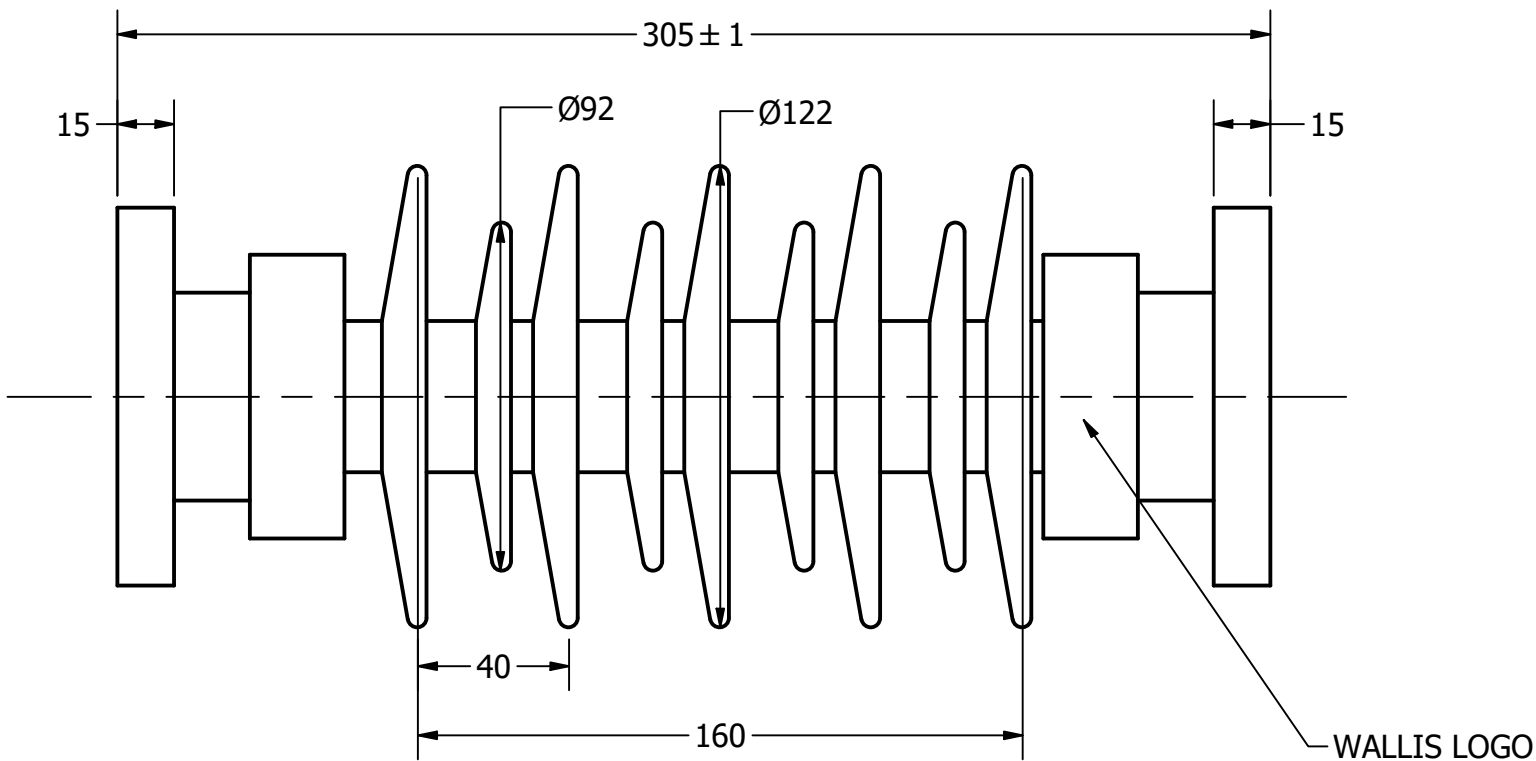

NOTES

- SPECIFIED VOLTAGE: 22kV
- ARCING DISTANCE: 260mm
- CREEPAGE DISTANCE: 765mm
- SPECIFIED BENDING LOAD: 12.5kN
- POWER FREQUENCY FLASHOVER DRY: 124kV
- POWER FREQUENCY FLASHOVER WET: 81kV
- POWER FREQUENCY WITHSTAND DRY: 108kV
- POWER FREQUENCY WITHSTAND WET: 65kV
- LIGHTNING IMPULSE WITHSTAND: 150kV

IF IN DOUBT - ASK

CONFIDENTIAL INFORMATION

THE INFORMATION AND DATA CONTAINED HEREIN IS PROPRIETARY AND SUBMITTED IN CONFIDENCE, AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY PURPOSE WHATSOEVER WITHOUT THE PRIOR WRITTEN PERMISSION OF A.N.WALLIS & CO. LTD. THIS LEGEND SHALL BE MARKED ON ANY REPRODUCTIONS HEREOF IN WHOLE OR IN PART. RECEIPT OF THIS DOCUMENT SHALL BE DEEMED TO BE AN ACCEPTANCE OF THE CONDITIONS SPECIFIED HEREIN.



A.N. WALLIS & Co. Ltd Greasley Street Bulwell Nottingham
East Midlands NG6 8NG United Kingdom
Tel: +44 (0) 115 927 1721
Email: info@an-wallis.com Website: www.an-wallis.com

PRODUCT GROUP CODE
11-03-02

PART No.
PI22G

REV.	ECN.	DATE	BY	DESCRIPTION		STANDARD	
						N/A	
						MATERIAL	
						VARIOUS	
						FINISH	
						VARIOUS	
REV. 1		CHECKED BY R.Phillis		DATE 06/10/2025		TOLERANCES DISTANCE: ±0.5mm (UOS) ANGULAR: ±2° (UOS)	
DRAWN BY S.Billings		DATE 28/08/2025		SCALE 1 : 2		SHEET SIZE A3	
						PART DESCRIPTION 22kV COMPOSITE POST INSULATOR - GREY	
						ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED	
							
						SHEET 1 / 1	